

APS2-6R

6.0 Amp Auxiliary Power Supply

General

The APS2-6R is a state-of-the-art, 150 watt, switching auxiliary power supply providing 24 VDC of filtered DC power. The APS2-6R provides three 24 VDC output circuits, rated for 6.0 Amps in alarm and 4.0 Amps continuous. It is used for the operation of peripheral devices for the Protectwell Onyx Series control panels.

Features

- UL 864 Ninth Edition compliant.
- Lightweight, compact design.
- 120 or 220/240 VAC (@ 50/60 Hz) versions.
- Output circuits with overload protection.
- Built-in "brown-out" circuitry.
- Diagnostic trouble LED.
- Plug-in connector for in-cabinet applications and screw terminals for remote device applications.
- Trouble supervision bus.
- Shares battery and charger circuit with control panel.
- Power-limited design, per UL requirements.
- AC Fail supervision and reporting with field-selectable delay per UL 864.
- Heavy-duty clamp-type terminals accept up to 12 AWG (3.1 mm²) wire.
- Battery voltage supervision.
- Low battery disconnect.
- Mounts in a standard CAB-3/CAB-4 Series cabinet.


Construction and Operation

When used with the CAB-3 or CAB-4 Series (CAB-A3/-A4, -B3/-B4, -C3/-C4, or -D3/-D4), the APS2-6R mounts to a CHS-4 or CHS-4L mounting chassis. If more than one APS2-6R is necessary to satisfy Audible/Visual (DC power requirements, connect additional APS2-6R power supplies together as described in the Installation Instruction Manual.

Specifications

ELECTRICAL SPECIFICATIONS

AC primary input power (TB1): APS2-6R: 120 VAC, 50/60 Hz, 2.9 A., **APS2-6RE:** 220-240 VAC, 50/60 Hz, 1.5A.

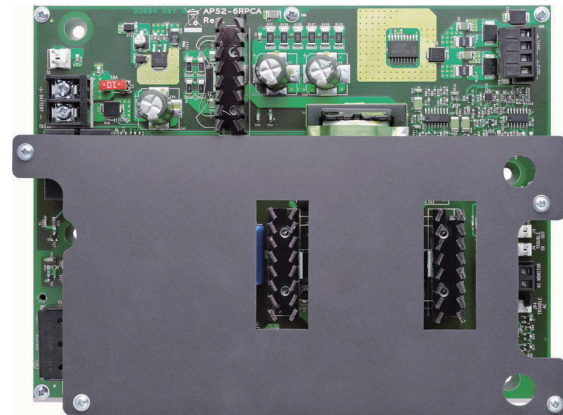

DC secondary input power (TB3): TB3-1 (+, TB3-2 (-).

24 VDC output power (TB2): Total 6.0 A (4.0 A continuous).
Circuit 1 (TB2-1, TB2-2): 3.0 A @ 24 VDC power-limited.
Circuit 2 (TB2-3, TB2-4): 3.0 A @ 24 VDC power-limited.

24 VDC output power (J9): 6.0 A (4.0 A continuous, Non-Power Limited).

Relay Contacts (TB4): AC Fail supervision over the SLC.

Fuse: (F2 battery supervision): 32 VAC, 10.0 A, Fast-Acting Automotive Minifuse.

Trouble supervision bus: J3 output: Form-A contact (open collector). **J4 input:** Form-A contact (open collector).

NOTE: J3 and J4 can be interchanged.

Loss of AC indication: Immediate indication (default); 1-2 hour delay (cut JP2); 2-3 hour delay (cut JP2 and JP3).

MECHANICAL SPECIFICATIONS

The APS2-6R measures approximately 8.625" (21.91 cm) x 6.625" (16.83 cm) x 2.375" (6.03 cm) and weighs approximately 2 lbs (0.91kg).

Cabinet for Mounting

CAB-3/CAB-4 Series: Use CHS-4 and CHS-4L chassis for PTW-3300 control panels.

SE-190508-C



APS2-6R

6.0 Amp Auxiliary Power Supply

Product Line Information

APS2-6R: 24-volt, filtered power supply (120 VAC input).

APS2-6RE: 24-volt, filtered power supply (220-240 VAC input)
EOLR-1: 12/24 VDC end-of-line relay.

CHS-4: Four-module chassis.

CHS-4L: Four-module chassis (low-profile).

R-47K: End of Line Resistor Assembly.

Installation Standards and Codes

This power supply complies with the standards set forth by the following regulatory agencies:

NFPA Standards

- NFPA 72 National Fire Alarm Code.

Underwriters Laboratories:

UL 864 Standard for Control Units and Accessories for Fire Alarm Systems. In addition, the installer should be familiar with the following standards:

- NEC Article 300 Wiring Methods
- Applicable Local and State Building Codes
- Requirements of the Local Authority Having Jurisdiction

Agency Listings and Approvals

The listings and approvals below apply to the basic APS2-6R. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL-Listed: S24647
- FM approved

SE-190508-C

