

# XP6-C

## Six Circuit Supervised Control Module

### General

The XP6-C six-circuit supervised control module provides intelligent alarm systems with supervised monitoring of wiring to load devices that require an external power supply to operate, such as horns, strobes, or bells. Each module is intended for switching applications involving AC DC or audio, which require wiring supervision. Upon command from the control panel, the XP6-C will disconnect the supervision and connect the external power supply across the load device.

The first module is addressed from 01 to 154 while the remaining modules are automatically assigned to the next five higher addresses. Each XP6-C module has terminals for connection to an external supply circuit for powering devices on its notification appliance circuit (NAC). One or multiple power supplies or amplifiers may be used.

**NOTE: Provisions are included for disabling a maximum of three unused addresses.**


Each XP6-C module features a short-circuit-protection monitor to protect the external power supply against short-circuit conditions on the NAC. When an alarm condition occurs, the relay which connects the external supply to the NAC will not be allowed to close if a short-circuit condition currently exists on the NAC. Additionally, an algorithm is incorporated to find shorts when the module is active. The XP6-C module will close all circuits that are not shorted to find the NAC with the problem.

Each XP6-C module has panel-controlled green LED indicators. The panel can cause the LEDs to blink, latch on, or latch off.

The SYNC-1 accessory card provides the XP6-C with additional functionality with compatible System Sensor® SpectrAlert® and SpectrAlert Advance® audio/visual devices.

### Features

- Six addressable Style B (Class B) or three addressable Style D (Class A) outputs that function as notification appliance/speaker/telephone circuits.
- Removable 12 AWG (3.31 mm<sup>2</sup>) to 18 AWG (0.821 mm<sup>2</sup>) plug-in terminal blocks.
- Status indicators for each point.
- Unused addresses may be disabled (up to 3).
- Rotary address switches.
- FlashScan® or CLIP operation.
- Optional SYNC-1 accessory card for SpectrAlert and SpectrAlert Advance devices.
- Mount one or two modules in a BB-XP cabinet (optional).
- Mount up to six modules on a CHS-6 chassis in a CAB-3 Series, CAB-4 Series, EQ Series, or BB-25 cabinet (optional).
- Mounting hardware included.

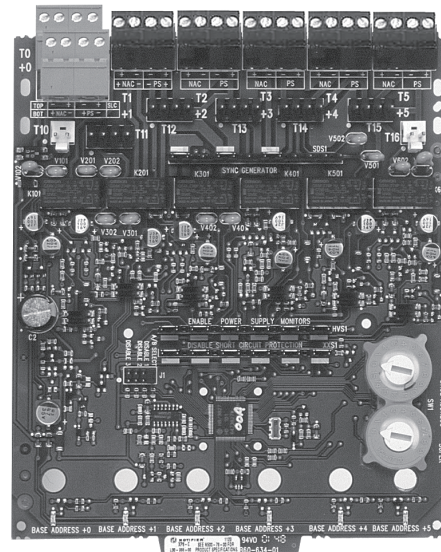

### Specifications for PCM-3

**Standby current:** 2.25 mA (SLC current draw with all addresses used; if some addresses are disabled, the standby current decreases).

**Alarm current:** 35 mA (assumes all six NACS have been switched once and all six LEDs solid ON).

**Temperature range:** 32°F to 120°F (0°C to 49°C) for UL applications; -10°C to +55°C for EN54 applications.

**Humidity:** 10% to 85% noncondensing for UL applications; 10% to 93% noncondensing for EN54 applications.

**Dimensions:** 6.8" (172.72 mm) high x 5.8" (147.32 mm) wide x 1.25" (31.75 mm) deep.

**Shipping weight:** 1.1 lb. (0.499 kg) including packaging.

**Mounting options:** CHS-6 chassis, BB-25 cabinet, BB-XP cabinet, CAB-3/CAB-4 series backboxes and doors, or EQ Series cabinet.

**Wire gauge:** 12 AWG (3.31 mm<sup>2</sup>) to 18 AWG (0.821 mm<sup>2</sup>), grounded.

**XP6-C is shipped in Class B position;** remove shunt for Class A operation.

**Maximum SLC wiring resistance:** 40 or 50 ohms, panel dependent.

**Maximum NAC wiring resistance:** 40 ohms.

**Power rating per circuit:** to 50 W @ 70.7 VAC; 50 W @ 25 VAC (UL applications only).

SE-190517-C

# XP6-C

## Six Circuit Supervised Control Module

Current ratings:

- 3.0 A @ 30 VDC maximum, resistive, non-coded.
- 2.0 A @ 30 VDC maximum, resistive, coded.
- 1.0 A @ 30 VDC maximum, inductive (L/R = 2 ms), coded.
- 0.5 A @ 30 VDC maximum, inductive (L/R = 5 ms), coded.
- 0.9 A @ 70.7 VAC maximum (UL only), resistive, noncoded.
- 0.7 A @ 70.7 VAC maximum (UL only), inductive (PF = 0.35), non-coded.

**Compatible devices:** See the documentation for your panel, and the PROTECTWELL Device Compatibility document. Contact PROTECTWELL. See also list of devices compatible with SYNC-1 below.

### SYNC-1 Accessory Card

The SYNC-1 accessory card is designed to operate with the XP6-C. It works with the SpectrAlert and the SpectrAlert Advance series of horns, strobes, and horn/strobes to provide a means of synchronizing the temporal-coded horns; synchronizing the one-second flash timing of the strobe; and silencing the horns of the horn/strobe combination over a two-wire circuit while leaving the strobes active. Each SYNC-1 accessory card is capable of synchronizing six Class B circuits or three Class A circuits.

**Maximum load on a loop:** 3 A.

**Operating temperature:** 32°F to 120°F (0°C to 49°C).

**Wire size:** 12 to 18 AWG (3.31 to 0.821 mm<sup>2</sup>).

**Operating voltage range:** 11 to 30 VDC FWR, filtered or unfiltered. Refer to notification appliance installation instructions for number of notification appliances and wire size.

**Compatible A/V devices:** The SYNC-1 Accessory Card is compatible with all System Sensor SpectrAlert and SpectrAlert Advance Audio Visual Devices that have synchronization capability. Other manufacturers may be supported as well.

**NOTE:** \*SpectrAlert and SpectrAlert Advance products utilizing SYNC-1 module below.

### Agency Listings and Approvals

The listings and approvals below apply to the XP10-M(A) TenInput Monitor Module. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL Listed: S635 (XP6-C); S3705 (SYNC-1).
- ULC Listed: S635 (XP6-CA).
- MEA Listed: 43-02-E / 226-03-E (SYNC-1).
- MEA Listed: 43-02-E / 226-03-E (SYNC-1).
- FDNY: COA#6121.
- FM Approved (Local Protective Signaling).
- CSFM: 7300-0028:0219 (XP6-C). 7300-1653:0160 (SYNC-1).
- Maryland State Fire Marshal: Permit # 2106 (XP6-C).

### Product Line Information

**XP6-C:** Six-circuit supervised control module.

**SYNC-1:** Optional accessory card for synchronization of compatible System Sensor SpectrAlert horns, strobes, and horn/strobes.

**CHS-6:** Chassis, mounts up to six modules in a CAB-4 Series cabinet or EQ Series cabinet.

SE-190517-C

